


LEDTOUCH Louver UG 40 W 865

LEDTOUCH Louver UG | Indoor LED ceiling luminaires

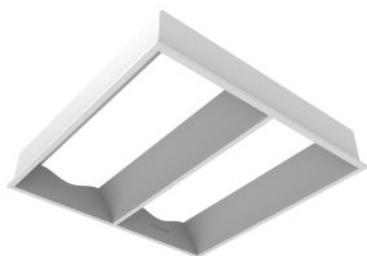

Areas of application

- Offices, schools
- Museums
- Hospitals

Product family benefits

- Easy and quick installation
- Elegant homogenous design
- Good glare reduction (UGR < 19)
- High-performance LEDs

Product family features

- Lifetime: up to 50,000 h
- High system efficiency: up to 100 lm/W



Product datasheet

Technical data

Product information

Order reference	LDTH LOU LL0401
-----------------	-----------------

Electrical data

Operating mode	ECG
Nominal wattage	40 W
Connected load	40 W
Nominal voltage	220...240 V
Supply voltage	220...240 V
Mains frequency	50/60 Hz

Photometrical data

Color temperature	6500 K
Color temperature [AGMP]	6500 K
Luminous flux	4400 lm
Color rendering index Ra	>80
Color rendering index Ra [AGMP]	>80

Light technical data

Beam angle	110 °
------------	-------

Dimensions & weight

Length	1197 mm
Width	297.0 mm
Height	110.0 mm
Product weight	5.1 kg

Colors & materials

Body material	steel
Product color	signal white (RAL 9003)
Cover material	PC

Temperatures & operating conditions

Ambient temperature range	-20...+40 °C
---------------------------	--------------

Additional product data

Type of cover	diffuser
---------------	----------

Product datasheet

Capabilities

Type of installation	recessed
----------------------	----------

Certificates & standards

Protection class	insulation class I (protective earthing)
Type of protection	IP20

Country specific categorizations

Order reference	LDTH LOU LL0401
-----------------	-----------------

Product datasheet

Logistical Data

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4052899431324	LEDTOUCH Louver UG 40 W 865	Folding carton box 1	- x - x -		
4052899431331	LEDTOUCH Louver UG 40 W 865	Shipping carton box 2	1244 mm x 333 mm x 304 mm	125.93 dm ³	14330.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.