

LEDinspect FAST CHARGE SLIM500

Inspectionlights



Fast charge technology

Ca. 1h charging time from 0% to 100% battery capacity




500 Lumen

Two light functions - main light with up to 500 lm and torchlight function with up to 100 lm



Foldable lamp


High flexibility and diverse adjustment possibilities thanks to multi angle positioning



2-year OSRAM Guarantee

Systematic quality assurance measures underpin the premium workmanship and functionality of our products. Innovative technology and excellent quality really pay dividends for our customers.

Product family datasheet

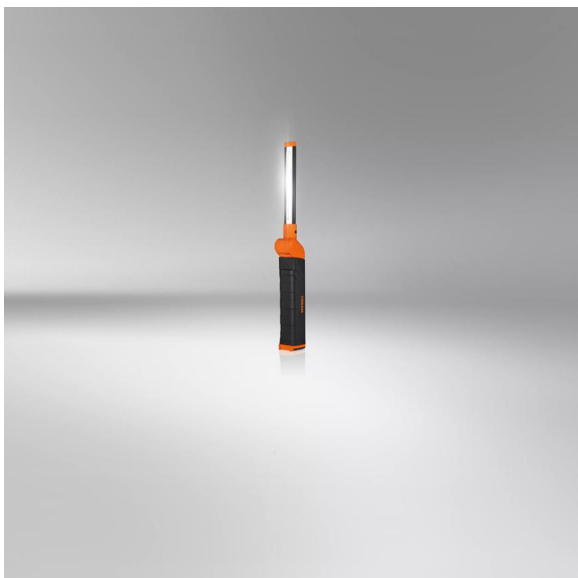

Light is versatile

This high-quality inspection light from OSRAM is perfect for professional and private use. With two light functions - main light with up to 500lm and torchlight function with up to 100lm, the appropriate light output can be retrieved depending on the task. The ultra-slim design in combination with the multi-angle positioning -270° twist and 180° flex- allows the light beam to be directed exactly where it is needed. While some inspection lights take up to three hours to charge the fast charge feature on the FAST CHARGE SLIM 500 takes the lamp from 0% to 100% battery charge in just about 1 hour while still offering a long service life. The inspection light is rechargeable, and the integrated charge level indicator shows the current status of the battery. A USB Type-C charging cable and the corresponding power adaptor are included in the scope of supply. In accordance with IP54 protection rating, this inspection light has protection against ingress of particles and against splashing water and is tested for impact resistance in accordance with IK08. This LED light is easy to carry, has a non-slip and dirt-repellent surface, includes an integrated hook & magnets for hands-free work and easy attachment, making it ideal for craft activities, car repairs and everyday use. In addition, OSRAM provides a 2-year guarantee on this product*

Product family datasheet

Technical data

	Product information	General Product Information	Electrical Data	
Product description	Application (Category and Product specific)	Global order reference	Nominal wattage	Nominal voltage
INSPECTION LAMP	LED inspection lights	LEDIL406	9.25 W	3.7 V

	Photometric Data			Physical Attributes & Dimensions
Product description	Color temperature	Nominal luminous flux	Light color LED	Product weight
INSPECTION LAMP	5700 K	500 lm	White	230.00 g

	Length	Width	Height	LED module information
Product description				Number of LEDs per module
INSPECTION LAMP	175.0 mm	44.0 mm	37.0 mm	2

	Colors & materials	Lifetime Data	Additional product data	
Product description	Base color	Guarantee	Type of Battery	Number of included batteries
INSPECTION LAMP	Black / Orange	2 years	Rechargeable	1



		Capabilities	Certificates & standards	Logistical data
Product description	Scope of battery	Technology	IK Class	Watt hour per battery
INSPECTION LAMP	Yes	LED	IK08	10.00

	Environmental & Regulatory Information Information according Art. 33 of EU Regulation (EC) 1907/2006 (REACH)			
Product description	Date of declaration	Candidate list substance 1	CAS No. of substance 1	Safe use instruction
INSPECTION LAMP	26-06-2024	Lead	7439-92-1	The identification of the Candidate List substance is sufficient to allow safe use of the article.

Product description	Declaration no. in SCIP database
INSPECTION LAMP	419e2613-0030-48f6-b0cb-c61fd9ca1e12

Product family datasheet

Download Data

File	
	User instruction LEDinspect FAST CHARGE SLIM 500
	Movie application LEDinspect Inspection Lights Trailer

Legal advice

Application advice:

For more detailed application information and graphics please see product datasheet and user instruction.*for precise conditions please refer to:

www.osram.com/am-guarantee

Application advice

For more detailed application information and graphics please see product datasheet.

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.