

# LEDDriving HLT BRIGHT H4

LEDDriving high and low beam lamps for truck



### Cool white color temperature of 6,000 K

Better visibility thanks to daylight effect



### Superior brightness

Up to +300% compared to minimum ECE R112. More light allows to see farther and therefore react sooner. Signs, obstacles and hazards can be recognized sooner



### LED replacement for conventional H4 high and low beam lamps

Reduced glaring thanks to an optimized light distribution



### H4 LED replacement for 24V

LEDDriving HLT BRIGHT replacement lamps offer a modern and intense light with a color temperature of up to 6,000 Kelvin. These replacement lamps are suitable for conventional H4 high and low beam lamps. LEDDriving HLT BRIGHT for high and low beam off-road applications are 24 V compatible and stand out with superior brightness, high compatibility, easier installation due to integrated driver and no radio disturbance. The pair of lamps comes with a 4-year OSRAM guarantee. For precise guarantee conditions please refer to [www.osram.com/am-guarantee](http://www.osram.com/am-guarantee). These products do not have ECE approval and must not be used on public roads in any exterior application. Public roads use leads to cancellation of operating license and loss of insurance coverage. Several countries forbid sale and use of these products. Please contact your local distributor for further information.

# Product datasheet

## Technical data

### Product information

Order reference	64196DWBRT
Product type (off-road vs. on-road)	Off-road $\pm$ H4
Application (Category and Product specific)	Mainly used for Low Beam, High Beam and Fog light applications


### Electrical data

Power input	15/15 W
Nominal voltage	24.0 V
Nominal wattage	15/15 W
Power input tolerance	$\pm 20$ %
Test voltage	28.0 V

### Photometrical data

Luminous flux	1200/1500 lm
Luminous flux tolerance	$\pm 20$ %
Color temperature	6000 K
Light color LED	Cool white

### Dimensions & weight

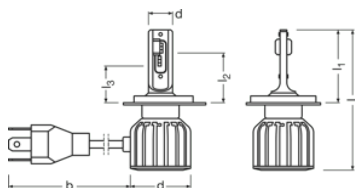

Length	80.2 mm
Diameter	14.0 mm
Product weight	80.00 g

### Lifespan

Lifespan Tc	2000 h
Guarantee	4 years

## Product datasheet

### Additional product data

Base (standard designation)	P43t
-----------------------------	------

### Capabilities

Technology	LED
------------	-----

### Country specific categorizations

Order reference	64196DWBRT
-----------------	------------

### Environmental information



Information according Art. 33 of EU Regulation (EC) 1907/2006 (REACH)	
Date of Declaration	29-02-2024
Primary Article Identifier	4062172379779
Declaration No. in SCIP database	In work

### Logistical Data

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4062172379779	LEDiving HLT BRIGHT $\triangle$ H4	Folding carton box 2	136 mm x 56 mm x 162 mm	1.23 dm <sup>3</sup>	261.00 g
4062172379786	LEDiving HLT BRIGHT $\triangle$ H4	Shipping carton box 8	240 mm x 148 mm x 182 mm	6.46 dm <sup>3</sup>	1170.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

### Download Data

File
 User instruction LEDiving HLT BRIGHT
 Brochures LEDiving Retrofits - Exchange overview (EN)

#### Safety advice

Application advice:For more detailed application information and graphics please see product datasheet and user manual.

#### Application advice

## Product datasheet

For more detailed application information and graphics please see product datasheet.

### Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.

# OSRAM